


Features:


- Hybrid Integrated Circuit
- Surface Mounted Device Type
- Shield Case : Nickel Silver
- 18PIN Type



Electrical Specifications (T_A=+25Deg.C, 50Ω system)

NO	ITEM	UNIT	MIN	TYP	MAX
1	Operating Frequency Range	MHz		10.0	
2	Output Power Level	dBm	+5.0	+7.0	+9.0
3	Harmonics Level (2 nd)	dBc			-10
4	Spurious Level	dBc			-70
5	Phase Noise at offset @ 1kHz at offset @ 10kHz at offset @ 100kHz	dBc/Hz dBc/Hz dBc/Hz		-125 -145 -150	
6	Lock Time	msec			30
7	Output Impedance	Ω		50	
8	VCO Supply Voltage	V	+3.15	+3.30	+3.45
9	PLL Supply Voltage	V	+3.15	+3.30	+3.45
10	Reference Freq.	MHz		10.0	
11	Reference Freq. Level	dBm	+0.0		
12	Current Consumption	mA			40
13	Lock Detector Voltage	V Low	V		+0.5
		V High	V	+3.0	
14	Operating Temp. Range	°C	-30		+75

Dimensions

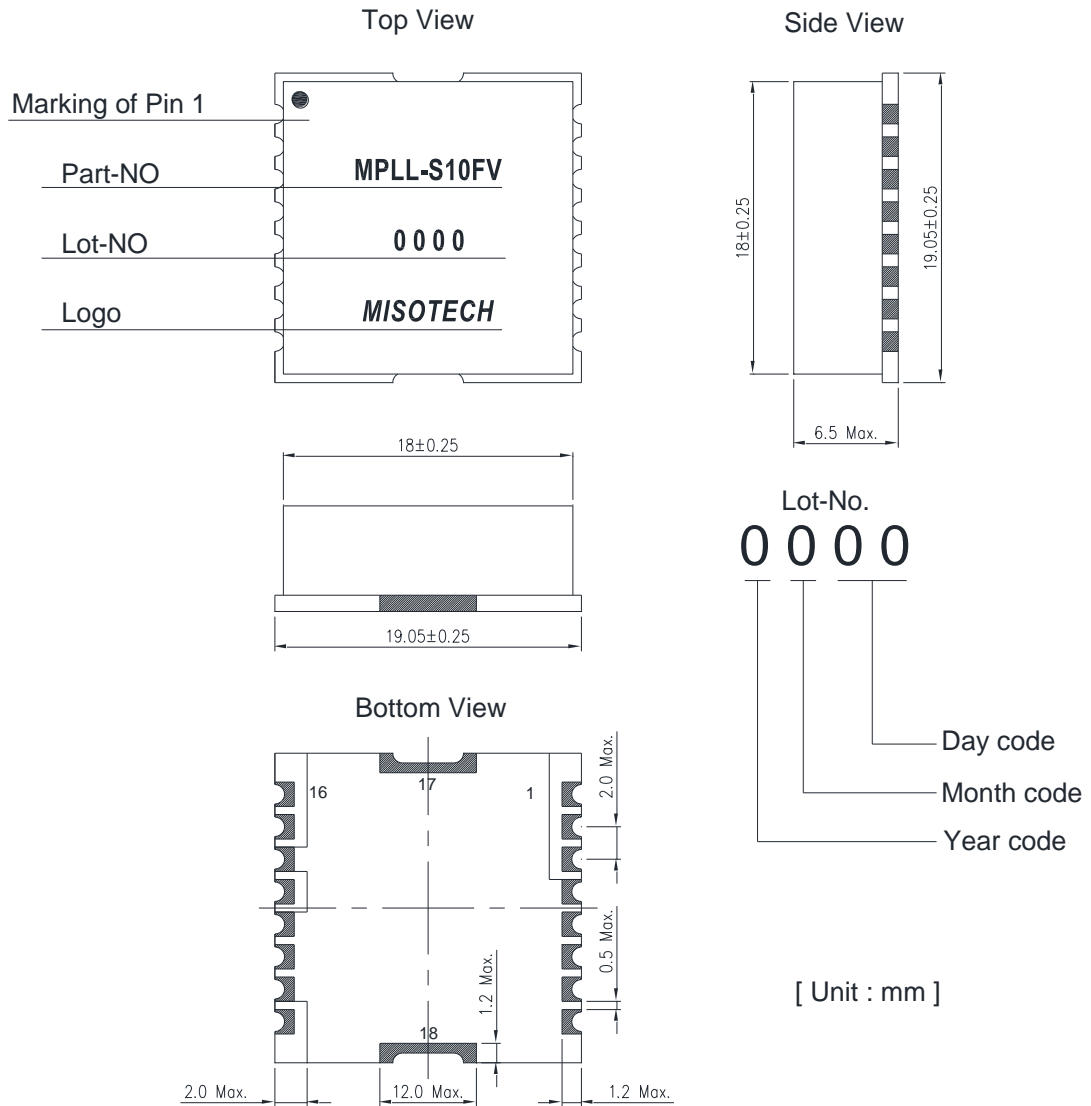

Terminal Connection			
Pin NO	Terminal NAME	Pin NO	Terminal NAME
4	Ref. IN	15	PLL Vcc
9	VCO Vcc	16	Lock Detect (LD)
13	RF Out		
All Other Pins are Ground			

Packing



Taping



REEL	TYPE	COLOR	HUB	SIZE
	PLASTIC	흑,백색	80	330
SHEET	KDS-BK 24mmX0.3t	POCKET COUNTER	750 POCKET	

REEL DIMENSION

Reel